

FINAL

**Note:** The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the



## TABLE OF CONTENTS

<b>1 - General Information</b> .....	<b>3</b>
1.1 Description of LED Light Sources .....	3
1.2 Standards Used: .....	3
1.3 Testing Equipment .....	3
1.4 Drive Level .....	4
1.5 Ambient Conditions for Maintenance Test.....	4
1.6 Photometric Measurement Method and Uncertainty.....	4
1.7 Statement of Traceability .....	4
1.8 Sample Set.....	5
<b>2 - Summary of Test Result</b> .....	<b>6</b>
<b>3 - Test Data</b> .....	<b>7</b>
3.1 Data Set 1, 85°C, 150mA(Lumen Maintenance) .....	7
3.2 Data Set 1, 85°C, 150mA (Forward Voltage).....	8
3.3 Data Set 1, 85°C,150mA(Chromaticity Shift) .....	9
3.4 Data Set 2, 105°C,150mA(Lumen Maintenance) .....	10
3.5 Data Set 2, 105°C, 150mA (Forward Voltage).....	11
3.6 Data Set 2, 105°C,150mA(Chromaticity Shift).....	12
<b>4 - DUT Photo</b> .....	<b>13</b>
4.1 Mechanical Dimensions .....	13
4.2 DUT Photo.....	13



## 1 - General Information

---

### 1.1 Description of LED Light Sources

#### Sample Size:

50 PCS samples were received on 2017-05-10. The samples were numbered from 1 to 25 and 26 to 50.

Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Part Number:	HL-EMC-3030DW-2C-S1-HR3
Part Type:	LED Package
Drive Level:	DC 150mA
Nominal CCT:	2700K
Power:	1.02W
Current Density per LED die:	930.0019mA/mm <sup>2</sup>
Power Density per LED die:	3.162W/mm <sup>2</sup>
CRI:	80
Die Spacing:	0.22mm

#### Sampling Method:

LED samples for IESNA LM-80 testing consist of units built from a minimum of three manufacturing lots with each manufacturing lot built from different wafer lots built on non-consecutive days.

These manufacturing lots are picked to represent a wide parametric distribution.

#### Note:

1. The applicant Hongli Zhihui Group Co.,Ltd. Guangzhou Branch. declare that their products with model HL-EMC-3030DW-2C-S1-HR3 are the same to the products in report#R2DG170510050-10-9000 and is authorized by original applicant to use their test data.
2. All the data in previous report (R2DG170510050-10-9000) is shared in this report.

### 1.2 Standards Used:

- ANSI/IES LM-80-15: IES Approved Method for Measuring Lumen Maintenance of LED Light Sources.
- CIE 127:2007: Measurement of LEDs(This standard was not accredited by IAS)
- ENERGY STAR® Requirements for the Use of LM-80 Data(This standard was not accredited by IAS)

### 1.3 Testing Equipment

Device	Manufacture
--------	-------------





## 1.8 Sample Set

### Data Set 1: 85°C, 150mA

Part Number: HL-EMC-3030DW-2C-S1-HR3  
Number of Units: 25  
Case Temperature: >83°C  
Ambient Temperature: >80°C  
Life Test Drive Current: 150mA  
Measurement Current: 150mA

### Data Set 2: 105°C, 150mA

Part Number: HL-EMC-3030DW-2C-S1-HR3  
Number of Units: 25  
Case Temperature: >103°C  
Ambient Temperature: >100°C  
Life Test Drive Current: 150mA  
Measurement Current: 150mA

FINAL



**2 - Summary of Test Result**

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration			Reported TM-21 L <sub>70</sub> Lifetime	Reported TM-21 L <sub>90</sub> Lifetime
1	25	0	1000hrs	9000hrs	3.217E-06	1.005	>54000 hours	34000 hours
2	25	0	1000hrs	9000hrs	3.718E-06	1.005	>54000 hours	30000 hours

Average Lumen Maintenance (Percentage of Initial Luminous Flux)

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	99.90%	99.67%	99.44%	99.17%	98.93%	98.71%	98.44%	98.01%	97.56%
2	99.73%	99.44%	99.17%	98.87%	98.60%	98.34%	98.03%	97.52%	97.03%

Average Chromaticity Shift

Data Set:	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	0.0002	0.0005	0.0006	0.0010	0.0013	0.0018	0.0021	0.0026	0.0030
2	0.0003	0.0007	0.0008	0.0013	0.0015	0.0019	0.0023	0.0028	0.0033

Average Lumen Maintenance and Chromaticity Shift VS. Time





**Test Data**

**3.1 Data Set 1, 85°C, 150mA (Lumen Maintenance)**

No.	(lm)	Lumen Maintenance (%)								
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	139.5	100.07	99.93	99.64	99.43	99.28	99.21	98.92	98.42	97.85
2	137.8	99.93	99.78	99.64	99.56	99.35	99.13	98.84	98.40	97.97
3	138.1	100.07	99.71	99.42	99.06	98.84	98.70	98.48	98.04	97.61
4	139.2	99.86	99.71	99.57	99.35	98.99	98.92	98.71	98.28	97.99
5	137.3	99.85	99.64	99.42	99.27	98.98	98.91	98.54	98.18	97.67
6	140.8	100.07	99.93	99.50	99.15	99.01	98.86	98.44	97.94	97.51
7	142.3	99.86	99.58	99.44	99.09	98.95	98.74	98.38	98.03	97.33
8	139.1	99.78	99.64	99.42	99.28	98.99	98.85	98.71	98.20	97.70
9	140.2	99.93	99.79	99.43	99.22	99.00	98.86	98.57	97.86	97.43
10	141.3	99.86	99.65	99.50	99.15	98.94	98.80	98.51	98.02	97.38
11	141.3	100.07	99.72	99.36	99.01	98.73	98.30	98.02	97.74	97.31
12	138.5	100.14	99.78	99.57	99.28	99.06	98.92	98.56	98.19	97.76
13	137.0	100.07	99.78	99.64	99.34	99.12	98.76	98.61	98.18	97.88
14	136.7	100.15	99.93	99.78	99.41	99.20	98.76	98.46	98.17	97.59
15	137.5	99.85	99.71	99.35	99.05	98.76	98.69	98.47	98.18	97.75
16	138.3	99.93	99.71	99.49	99.20	98.92	98.77	98.63	98.26	98.05
17	138.8	99.86	99.78	99.71	99.28	99.06	98.70	98.49	97.98	97.77
18	138.2	99.71	99.42	99.35	99.06	98.70	98.63	98.34	97.83	97.40
19	136.5	99.78	99.56	99.19	99.12	98.90	98.83	98.53	98.17	97.66
20	138.5	99.71	99.49	99.28	99.13	98.92	98.84	98.41	98.05	97.40
21	137.2	99.85	99.49	99.20	98.91	98.69	98.54	98.40	98.03	97.81
22	136.3	99.78	99.41	99.05	98.68	98.53	98.17	97.87	97.43	96.77
23	139.4	99.86	99.50	99.35	99.00	98.78	98.57	98.28	97.56	96.84
24	140.0	99.71	99.36	99.14	98.86	98.57	97.64	97.29	97.07	96.79
25	138.5	99.78	99.71	99.49	99.28	98.92	98.70	98.56	98.12	97.91
Avg.	138.7	99.90	99.67	99.44	99.17	98.93	98.71	98.44	98.01	97.56
Med.	138.5	99.86	99.71	99.43	99.15	98.94	98.76	98.49	98.05	97.66
st dev	1.5968	0.1365	0.1602	0.1796	0.1958	0.2003	0.3114	0.3260		

# Bay Area Compliance Laboratories Corp. (Dongguan)

No.69,Pulongcun, Puxinhu Industrial Area Tangxia ,  
Dongguan, Guangdong, China.  
The IAS Accreditation Number TL-460

## 3.2 Diode Forward Voltage @ 35°C, 150mA (Forward Voltage)

No.	Forward Voltage (V)									
	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs	
1	5.975	5.979	5.975	5.978	5.979	6.004	5.981	5.995	5.994	
2	5.883	5.886	5.883	5.885	5.888	5.906	5.888	5.900	5.917	
3	5.895	5.895	5.888	5.894	5.895	5.912	5.894	5.904	5.912	
4	5.888	5.889	5.889	5.902	5.894	5.908	5.893	5.904	5.916	
5	5.886	5.889	5.890	5.894	5.891	5.907	5.892	5.899	5.914	
6	5.998	6.000	6.001	6.012	6.006	6.031	6.003	6.015	6.024	
7	6.000	5.997	6.002	6.006	6.004	6.033	6.010	6.014	6.021	
8	5.893	5.901	5.894	5.898	5.902	5.913	5.900	5.906	5.933	
9	6.027	6.026	6.028	6.031	6.032	6.056	6.033	6.041	6.050	
10	5.974	5.975	5.977	5.979	5.985	6.003	5.981	5.987	5.997	
11	5.976	5.980	5.981	5.984	5.989	6.005	5.984	5.991	6.000	
12	5.963	5.963	5.963	5.967	5.970	5.986	5.967	5.976	5.982	
13	5.904	5.889	5.892	5.903	5.897	5.907	5.896	5.899	5.917	
14	5.972	5.968	5.973	5.980	5.979	5.996	5.972	5.982	5.996	
15	5.876	5.880	5.880	5.887	5.882	5.902	5.886	5.889	5.903	
16	5.885	5.884	5.887	5.891	5.887	5.902	5.890	5.893		
17	6.001	6.003	6.008	6.009	6.013	6.032	6.008	6.014	6.025	
18	5.873	5.878	5.882	5.881	5.883	5.895	5.881	5.887	5.903	
19	5.875	5.881	5.883	5.890	5.886	5.896	5.884	5.889	5.900	
20	5.884			5.890	5.894		5.894	5.890	5.910	
21	5.870	5.875	5.881	5.879	5.882	5.894	5.881	5.886	5.904	
22	5.949	5.927	5.937	5.938	5.971	5.939	5.955	5.937	5.944	5.962





**3.3 Data Set 1, 85°C, 150mA (Chromaticity Shift)**

No.	u'	v'	CCT(K)	Chromaticity Shift ( u'v')								
	0hr(Initial)			1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
1	0.2631	0.5279	2686	0.0003	0.0004	0.0007	0.0011	0.0015	0.0018	0.0021	0.0025	0.0028
2	0.2618	0.5242	2727	0.0002	0.0005	0.0007	0.0010	0.0014	0.0020	0.0022	0.0025	0.0030
3	0.2612	0.5237	2742	0.0001	0.0004	0.0005	0.0009	0.0011	0.0018	0.0021	0.0025	0.0029
4	0.2604	0.5239	2758	0.0002	0.0006	0.0007	0.0012	0.0013	0.0018	0.0023	0.0027	0.0031
5	0.2620	0.5251	2720	0.0002	0.0004	0.0007	0.0009	0.0012	0.0016	0.0020	0.0024	0.0029
6	0.2621	0.5241	2723	0.0002	0.0006	0.0007	0.0011	0.0015	0.0019	0.0022	0.0026	0.0031
7	0.2606	0.5251	2749	0.0002	0.0004	0.0005	0.0010	0.0013	0.0017	0.0021	0.0027	0.0031
8	0.2609	0.5247	2744	0.0002	0.0005	0.0006	0.0009	0.0012	0.0017	0.0019	0.0024	0.0030
9	0.2629	0.5243	2704	0.0002	0.0006	0.0007	0.0010	0.0015	0.0018	0.0022	0.0027	0.0031
10	0.2609	0.5242	2747	0.0002	0.0005	0.0006	0.0010	0.0014	0.0018	0.0022	0.0026	0.0030
11	0.2617	0.5246	2729	0.0002	0.0006	0.0006	0.0011	0.0013	0.0018	0.0022	0.0026	0.0030
12	0.2616	0.5236	2735	0.0001	0.0004	0.0004	0.0008	0.0013	0.0016	0.0021	0.0025	0.0029
13	0.2625	0.5253	2708	0.0001	0.0006	0.0007	0.0012	0.0014	0.0020	0.0024	0.0029	0.0033
14	0.2624	0.5243	2715	0.0002	0.0005	0.0008	0.0011	0.0013	0.0017	0.0021	0.0026	0.0030
15	0.2626	0.5244	2710	0.0002	0.0004	0.0006	0.0010	0.0012	0.0017	0.0021	0.0025	0.0030
16	0.2619	0.5246	2723	0.0001	0.0005	0.0006	0.0009	0.0014	0.0017	0.0021	0.0026	0.0028
17	0.2623	0.5251	2714	0.0001	0.0004	0.0005	0.0009	0.0009	0.0017	0.0019	0.0025	0.0027
18	0.2614	0.5246	2734	0.0003	0.0006	0.0007	0.0013	0.0016	0.0021	0.0025	0.0029	0.0034
19	0.2615	0.5243	2734	0.0002	0.0006	0.0009	0.0013	0.0015	0.0020	0.0024	0.0029	0.0032
20	0.2625	0.5250	2710	0.0002	0.0006	0.0009	0.0012	0.0014	0.0018	0.0021	0.0026	0.0031
21	0.2619	0.5251	2723	0.0002	0.0005	0.0005	0.0008	0.0009	0.0015	0.0019	0.0024	0.0026
22	0.2612	0.5219	2751	0.0002	0.0005	0.0005	0.0008	0.0013	0.0017	0.0021	0.0026	0.0028
23	0.2616	0.5245	2732	0.0001	0.0004	0.0007	0.0008	0.0011	0.0019	0.0021	0.0025	0.0027
24	0.2602	0.5248	2759	0.0002	0.0004	0.0007	0.0009	0.0013	0.0015	0.0019	0.0024	0.0027
25	0.2607	0.5247	2748	0.0000	0.0003	0.0006	0.0008	0.0010	0.0014	0.0019	0.0024	0.0027
Avg.	0.2617	0.5246	2729	0.0002	0.0005	0.0006	0.0010	0.0013	0.0018			



## Bay Area Compliance Laboratories Corp. (Dongguan)

No.69,Pulongcun, Puxinhu Industrial Area Tangxia ,  
Dongguan, Guangdong, China.  
The IAS Accreditation Number TL-460

### 3.4 Data Set 2, 105°C, 150mA (Lumen Maintenance)

No.	(lm)	Lumen Maintenance (%)								
	Ohr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs	7000hrs	8000hrs	9000hrs
26	138.2	99.71	99.57	99.42	99.13	98.91	98.77	98.41	97.90	97.61
27	125.1	99.76	99.44	98.96	98.56	98.08	97.60	97.20	96.72	96.08
28	137.2	99.78	99.64	99.56	99.27	98.83	98.47	98.32	97.81	97.52
29	133.3	99.70	99.47	99.32	99.25	98.87	98.65	98.20	97.75	97.52
30	139.0	99.64	99.42	99.21	98.99	98.78	98.63	98.35	97.91	97.41
31	136.3	99.71	99.41	99.19	98.90	98.61	98.39	98.17	97.58	97.14
32	137.3	99.64	99.34	99.20	98.98	98.69	98.54	98.32	97.67	97.16
33	138.3	99.78	99.42	99.13	98.84	98.77	98.41	98.12	97.61	97.25
34	137.2	99.64	99.13	98.83	98.47	98.32	98.10	97.59	97.08	96.50
35	140.3	99.71	99.43							

**Bay Area Compliance Laboratories Corp. (Dongguan)**

No.69,Pulongcun, Puxinhu Industrial Area Tangxia ,  
Dongguan, Guangdong, China.  
The IAS Accreditation Number TL-460


FINAL



#### 4 - DUT Photo


---

##### 4.1 Mechanical Dimensions

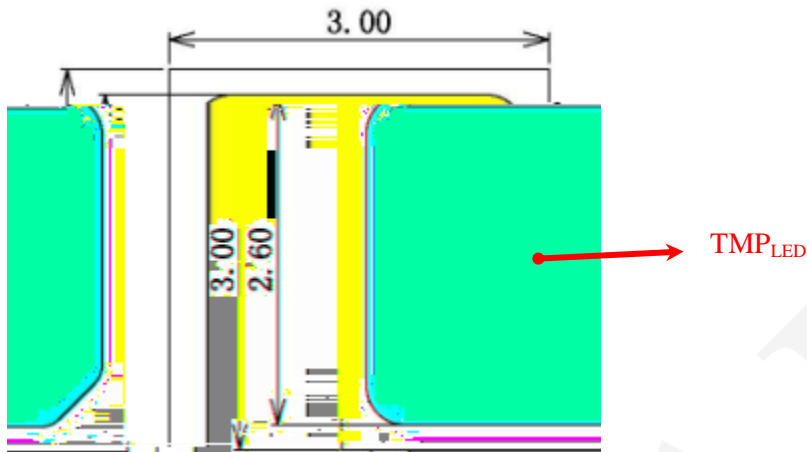

All dimensions are in millimeter

##### 4.2 DUT Photo

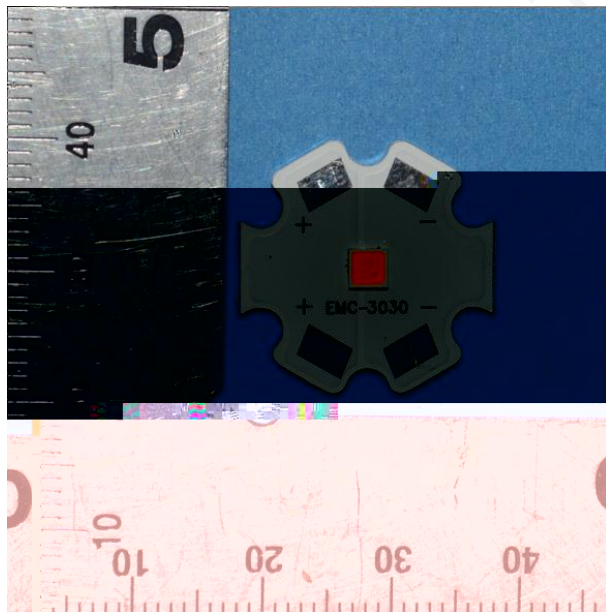

\*\*\*\*\*END OF REPORT\*\*\*\*\*