



TEST REPORT

According to ANSI/IES LM-80-15
For

Hongli Zhihui Group Co.,Ltd. Guangzhou Branch

Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China

#Model: HL-AS-2835IR2C-L1-08-PCT

Report Type: 6000 Hours Test Report		Product Type: LED Package	
Reviewed By:	Pote Wang	<i>Pote Wang</i>	
Report Number:	RSZ190428534-10-6000		
Test Date:	2020-01-04 to 2020-10-15		
Report Date:	2020-10-23		
Approved by:	Blake Zhang / EE Engineer		
Test Facility:	Test facility was located at No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China.		
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan). No.69,Pulongcun ,Puxinhu Industrial Area, Tangxia , Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588		
Accreditation:	The IAS Accreditation Number TL-460.		



TABLE OF CONTENTS

1 - General Information	3
1.1 Description of LED Light Sources	3
1.2 Standards and Reference Documentations	3
1.3 Testing Equipment	4
1.4 Drive Level	4
1.5 Ambient Conditions for Maintenance Test	4
1.6 Photometric Measurement Method and Uncertainty.....	4
1.7 Statement of Traceability	4
1.8 Sample Set.....	5
2 - Summary of Test Result	6
3 - Test Data	7
3.1 Data Set 1, 85°C, 150mA (700-800nm Photon Flux Maintenance)	7
3.2 Data Set 1, 85°C, 150mA (Forward Voltage).....	8
3.3 Data Set 1, 85°C, 150mA (Wavelength)	9
3.4 Data Set 2, 105°C, 150mA (700-800nm Photon Flux Maintenance)	10
3.5 Data Set 2, 105°C, 150mA (Forward Voltage).....	11
3.6 Data Set 2, 105°C, 150mA (Wavelength)	12
4 - DUT Photo	13
4.1 #Mechanical Dimensions.....	13
4.2 DUT Photo.....	13
Directions	14

Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,

Dongguan, Guangdong, China.

The IAS Accreditation Number TL-460

FINAL



1.8 Sample Set

Data Set 1: 85°C, 150mA

Part Number: HL-AS-2835IR2C-L1-08-PCT
Number of Units: 30
Case Temperature: >83°C
Ambient Temperature: >80°C
Life Test Drive Current: 150mA
Measurement Current: 150mA

Data Set 2: 105°C, 150mA

Part Number: HL-AS-2835IR2C-L1-08-PCT
Number of Units: 30
Case Temperature: >103°C
Ambient Temperature: >100°C
Life Test Drive Current: 150mA
Measurement Current: 150mA



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

2 - Summary of Test Result

Data Set:	Sample Size	Failures Observed:	Test Interval	Test Duration		Reported TM-21 Q ₇₀ Lifetime	Reported TM-21 Q ₉₀ Lifetime
-----------	-------------	--------------------	---------------	---------------	--	---	---

FUNNIAL

3 - Test Data

3.1 Data Set 1, 85°C, 150mA (700-800nm Photon Flux Maintenance)

No.	$\rho_{p,fr}$ ($\mu\text{mol} \times \text{s}^{-1}$)	700-800nm Photon Flux Maintenance (%)					
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	0.6826	100.69	100.44	100.12	99.88	99.56	99.33
2	0.6542	100.50	100.20	99.89	99.60	99.34	99.11
3	0.6904	100.43	100.16	100.03	99.93	99.64	99.26
4	0.6861	100.64	100.19	99.78	99.56	99.34	99.07
5	0.6915	100.58	100.27	100.19	99.91	99.52	99.36
6	0.6886	101.00	100.68	100.25	100.01	99.81	99.51
7	0.7030	100.85	100.40	100.26	99.91	99.72	99.46
8	0.6869	100.92	100.54	100.51	100.20	99.93	99.53
9	0.6831	100.07	99.71	99.33	99.06	98.76	98.54
10	0.6826	100.64	100.29	100.26	99.99	99.66	99.40
11	0.6888	100.36	100.13	100.00	99.67	99.30	98.95
12	0.6939	99.67	99.35	99.18	98.83	98.60	98.34
13	0.6813	99.94	99.56	99.05	98.77	98.49	98.21
14	0.6948	99.90	99.61	99.45	99.32	99.14	98.79
15	0.6911	100.29	100.01	99.67	99.42	99.15	98.78
16	0.6867	100.32	100.06	99.87	99.64	99.45	99.24
17	0.6930	100.03	99.70	99.64	99.34	99.00	98.63
18	0.6895	100.48	100.03	99.64	99.33	99.14	98.87
19	0.6945	99.88	99.55	99.06	98.73	98.47	98.26
20	0.6831	99.72	99.43	99.19	98.99	98.68	98.42
21	0.6831	100.23	99.90	99.74	99.39	98.99	98.61
22	0.6955	99.84	99.45	99.37	99.08	98.78	98.55
23	0.6936	99.99	99.68	99.60	99.28	99.03	98.75
24	0.6892	99.91	99.41	99.19	98.96	98.69	98.35
25	0.6862	99.24	98.92	98.91	98.59	98.25	97.87
26	0.6932	99.57	99.22	99.16	99.05	98.73	98.49
27	0.6892	99.65	99.25	99.07	98.87	98.51	98.10
28	0.6973	100.06	99.56	99.44	99.08	98.78	98.51
29	0.6966	100.07	99.71	99.02	98.82	98.56	98.21
30	0.6791	100.04	99.57	99.19	99.00	98.72	98.47
Avg.	0.6883	100.18	99.83	99.60	99.34	99.06	98.77
Med.	0.6892	100.07	99.71	99.62	99.33	99.02	98.69
st dev	0.0085	0.43	0.44	0.46	0.45	0.46	0.47
Min.	0.6542	99.24	98.92	98.91	98.59	98.25	97.87
Max.	0.7030	101.00	100.68	100.51	100.20	99.93	99.53



3.2 Data Set 1, 85°C, 150mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
1	2.112	2.141	2.127	2.127	2.128	2.128	2.129
2	2.120	2.198	2.157	2.149	2.147	2.147	2.148
3	2.104	2.126	2.113	2.114	2.118	2.116	2.120
4	2.098	2.118	2.102	2.110	2.110	2.115	2.113
5	2.143	2.165	2.149	2.149	2.160	2.156	2.161
6	2.156	2.182	2.169	2.171	2.176	2.173	2.176
7	2.164	2.187	2.167	2.167	2.180	2.179	2.181
8	2.138	2.164	2.146	2.144	2.166	2.159	2.157
9	2.116	2.143	2.123	2.125	2.136	2.133	2.138
10	2.113	2.142	2.123	2.134	2.151	2.144	2.149
11	2.156	2.184	2.172	2.165	2.179	2.169	2.174
12	2.150	2.179	2.164	2.160	2.171	2.180	2.177
13	2.107	2.132	2.120	2.114	2.127	2.124	2.126
14	2.147	2.173	2.160	2.153	2.168	2.168	2.167
15	2.136	2.159	2.147	2.143	2.159	2.154	2.153
16	2.122	2.146	2.134	2.126	2.143	2.149	2.144
17	2.135	2.160	2.146	2.140	2.154	2.164	2.156
18	2.114	2.136	2.121	2.116	2.131	2.132	2.133
19	2.143	2.164	2.151	2.145	2.164	2.163	2.162
20	2.114	2.138	2.124	2.118	2.135	2.135	2.138
21	2.108	2.128	2.118	2.108	2.124	2.122	2.132
22	2.151	2.173	2.160	2.152	2.172	2.167	2.173
23	2.126	2.147	2.139	2.128	2.162	2.147	2.147
24	2.110	2.133	2.123	2.113	2.130	2.128	2.128
25	2.108	2.132	2.119	2.110	2.130	2.128	2.126
26	2.108	2.128	2.120	2.109	2.128	2.129	2.129
27	2.111	2.133	2.121	2.113	2.131	2.132	2.130
28	2.144	2.162	2.157	2.145	2.162	2.161	2.165
29	2.161	2.182	2.173	2.161	2.176	2.180	2.181
30	2.117	2.139	2.131	2.125	2.137	2.137	2.139
Avg.	2.128	2.153	2.139	2.134	2.149	2.147	2.148
Med.	2.121	2.147	2.137	2.131	2.149	2.147	2.148
st dev	0.020	0.022	0.020	0.020	0.020	0.020	0.020
Min.	2.098	2.118	2.102	2.108	2.110	2.115	2.113
Max.	2.164	2.198	2.173	2.171	2.180	2.180	2.181



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

3.4 Data Set 2, 105°C, 150mA (700-800nm Photon Flux Maintenance)

No.

FINAL




3.5 Data Set 2, 105°C, 150mA (Forward Voltage)

No.	Forward Voltage (V)						
	0hr(Initial)	1000hrs	2000hrs	3000hrs	4000hrs	5000hrs	6000hrs
31	2.118	2.161	2.135	2.127	2.140	2.140	2.145
32	2.106	2.148	2.124	2.113	2.130	2.127	2.129
33	2.114	2.153	2.132	2.118	2.135	2.132	2.134
34	2.119	2.157	2.134	2.123	2.138	2.136	2.136
35	2.133	2.170	2.145	2.134	2.149	2.154	2.163
36	2.150	2.189	2.164	2.153	2.169	2.169	2.182
37	2.112	2.177	2.156	2.146	2.166	2.162	2.171
38	2.103	2.138	2.114	2.108	2.124	2.122	2.133
39	2.153	2.189	2.169	2.155	2.173	2.169	2.176
40	2.099	2.133	2.115	2.102	2.120	2.111	2.131
41	2.121	2.156	2.131	2.121	2.144	2.135	2.141
42	2.148	2.181	2.159	2.148	2.171	2.164	2.165
43	2.098	2.128	2.108	2.101	2.119	2.114	2.116
44	2.113	2.143	2.124	2.115	2.131	2.129	2.132
45	2.123	2.153	2.134	2.125	2.139	2.140	2.147
46	2.151	2.184	2.169	2.153	2.169	2.170	2.176
47	2.136	2.165	2.153	2.138	2.152	2.152	2.156
48	2.135	2.167	2.158	2.138	2.152	2.158	2.163
49	2.115	2.147	2.137	2.120	2.132	2.138	2.138
50	2.155	2.186	2.178	2.156	2.171	2.173	2.177
51	2.110	2.170	2.159	2.144	2.153	2.159	2.161
52	2.112		2.139	2.117	2.133	2.129	2.134

FINAL


4 - DUT Photo

4.1 #Mechanical Dimensions

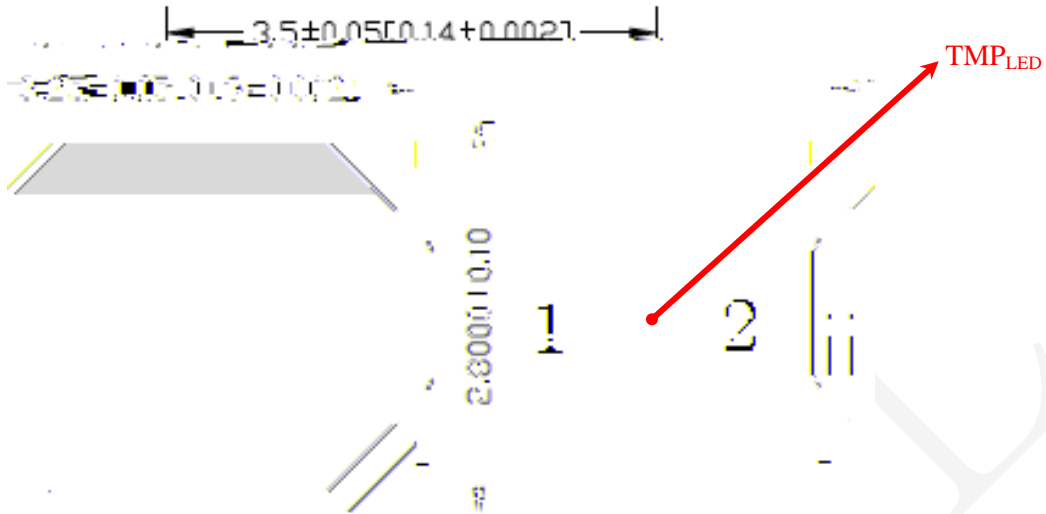

All dimensions are in millimeter

4.2 DUT Photo

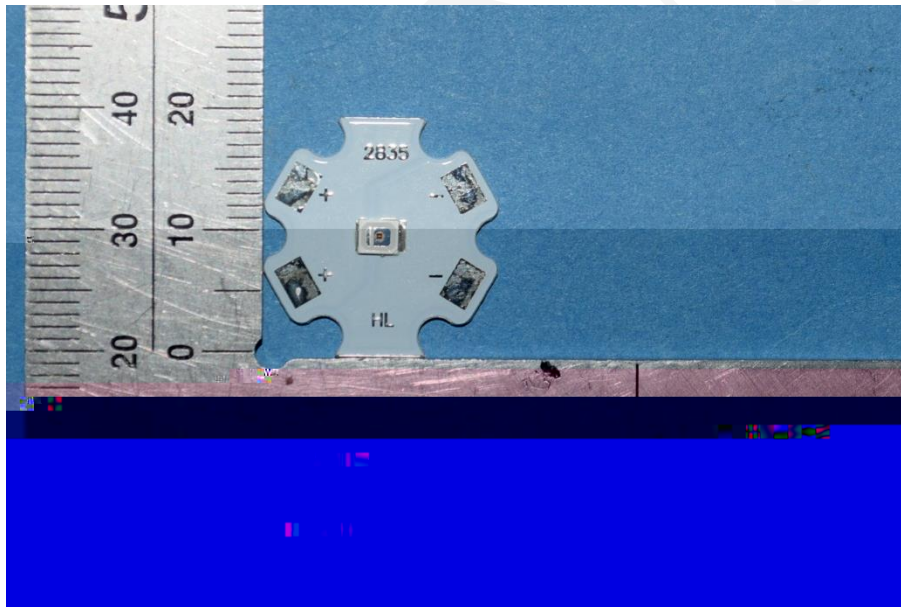



Bay Area Compliance Laboratories Corp. (Dongguan)

No.69, Pulongcun, Puxinhu Industrial Area Tangxia ,
Dongguan, Guangdong, China.
The IAS Accreditation Number TL-460

Directions

*****END OF REPORT*****

FUNNALL