TEST REPORT

IEC 62471:2006

Photobiological safety of lamps and lamp systems

Report reference No ..... :	SZ2231010-58974E-SF
Compiled by (+ signature) ..... :	Engineer: Vic Zhang
Approved by (+ signature) ..... :	Team Leader: Harrison Huang
Date of issue ..... :	2023-10-17
Testing laboratory ..... :	Bay Area Compliance Laboratories Corp. (Dongguan)
Address ..... :	No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China
Testing location ..... :	Same as above
Applicant ..... :	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
Address ..... :	Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China
Standard ..... :	IEC 62471:2006
Test sample(s) received..... :	2023-10-11
Test in period..... :	2023-10-12
Procedure deviation ..... :	N.A.
Non-standard test method ..... :	N.A.
Type of test object ..... :	LED package
Trademark ..... :	N.A.
Model/type reference ..... :	HL-LM104H384W-5B2C12 (Ra2)-S
Manufacturer..... ..... :	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China
Rating ..... :	Input:34-40Vdc,0.200A

Copy of marking plate:

None

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict
4	EXPOSURE LIMITS		P
	Contents of the whole Clause 4 of IEC 62471: 2006moved into a new informative Annex ZB		P
	Clause 4 replaced by the following:		P
	Limits of the Artificial Optical Radiation have been applied instead of those fixed in IEC 62471: 2006	See Table 6.1	P
Annex ZB	EXPOSURE LIMITS		P
4.1	General		P
	The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure		P
	Detailed spectral data of a light source are generally required only if the luminance of the source exceeds 10^4 cd·m^{-2}	>10^4	

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

To standardize interpolated values, use linear

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 100 s are in Risk Group 1.		P
6.1.3	Risk Group 2 (Moderate-Risk)		N
	This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose:		N
	an actinic ultraviolet hazard (ES) within 1000 s exposure, nor		N
	a near ultraviolet hazard (EUVA) within 100 s, nor		N
	a retinal blue-light hazard (LB) within 0,25 s (aversion response), nor		N
	a retinal thermal hazard (LR) within 0,25 s (aversion response), nor		N
	an infrared radiation hazard for the eye (EIR) within 10 s		N
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (LIR), within 10 s are in Risk Group 2.		N
6.1.4	Risk Group 3 (High-Risk)		N
	Lamps which exceed the limits for Risk Group 2 are in Group 3.		N
6.2	Pulsed lamps		N
	Pulse lamp criteria shall apply to a single pulse andto any group of pulses within 0,25 s.		N
	A pulsed lamp shall be evaluated at the highest nominal energy loading as specified by the manufacturer.		N
	The risk group determination of the lamp being tested shall be made as follows:		N
	a lamp that exceeds the exposure limit shall be classified as belonging to Risk Group 3 (High-Risk)		N
	for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group		N
	for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance dose is below the EL, shall be evaluated using the continuous wave risk criteria discussed in clause 6.1, using time averaged values of the pulsed emission		N

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

Table 4.1	Spectral weighting function for assessing ultraviolet hazards for skin and eye	-

Wavelength[1] λ, nm	**UV hazard function $S_{UV}(\lambda)$**	**Wavelength λ, nm**	**UV hazard function $S_{UV}(\lambda)$**
200	0,030	313*	0,006
205	0,051	315	0,003
210	0,075	316	0,0024
215	0,095	317	0,0020
220	0,120	318	0,0016
225	0,150	319	0,0012
230	0,190	320	0,0010
235	0,240	322	0,00067
240	0,300	323	0,00054
245	0,360	325	0,00050
250	0,430	328	0,00044
254*	0,500	330	0,00041
255	0,520	333*	0,00037
260	0,650	335	0,00034
265	0,810	340	0,00028
270	1,000	345	0,00024
275	0,960	350	0,00020
280*	0,880	355	0,00016

3 3 5 335878 Tc[(335)]TJET0 810.97 ID 118/Lan.41 Tm0 g[( )]TJE

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

Table 4.2	Spectral weighting functions for assessing retinal hazards from broadband opticalsources	-

Wavelength nm	**Blue-light hazard function B()**	**Burn hazard function R()**
300	0,01	-
305	0,01	-
310	0,01	-
315	0,01	-
320	0,01	-
325	0,01	-
330	0,01	-
335	0,01	-
340	0,01	-
345	0,01	-
350	0,01	-
355	0,01	-
360	0,01	-
365	0,01	-
370	0,01	-
375	0,01	-
380	0,01	0,1
385	0,013	0,13
390	0,025	0,25
395	0,05	0,5
400	0,10	1,0
405	0,20	2,0
410	0,40	4,0
415	0,80	8,0
420	0,90	9,0
425	0,95	9,5
430	0,98	9,8
435	1,00	10,0
440	1,00	10,0
445	0,97	9,7
450	0,94	9,4
455	0,90	9,0
460	0,80	8,0
465	0,70	7,0
470	0,62	6,2
475	0,55	5,5
480	0,45	4,5
485	0,40	4,0
490	0,22	2,2
495	0,16	1,6
500-600	$10^{[(450-}$	1,0
600-700	0,001	1,0
700-1050	0,013	$10^{[(700-}$
1050-1150	0,025	0,2
1150-1200	0,05	$0,2.^{100.02(1150-}$
1200-1400	0,10	0,02

* Wavelengths chosen are representative: other values should be obtained by logarithmic interpolationat intermediate wavelengths.
*Emission lines of a mercury discharge spectrum.

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

Table 5.4	Summary of the ELs for the surface of the skin or cornea (irradiance based values)				-
Hazard Name	**Relevant equation**	**Wavelength Range nm**	**Explosure aperture rad(deg)**	**Limiting aperture rad(deg)**	**EL in items of constant irradiance $W.m^{-2}$**
Actinic UV skin & eye	E_S	200 400	< 30000	1,4 (80)	30/t
Eye UV-A	E_{UVA}	315 400	>1000	1,4 (80)	10000/t 10
Blue-light small source	E_B	300 700	>100	< 0,011	100/t 1,0
Eye IR	E_{IR}	780 3000	>1000	1,4 (80)	$18000/t^{0,75}$ 100
Skin thermal	E_H	380 3000	< 10		$20000/t^{0,75}$

Table 5.5	Summary of the ELs for the retina (radiance based values)				-
Hazard Name	**Relevant equation**	**Wavelength Range nm**	**Explosure duration Sec**	**Field of view radians**	**EL in terms of constant radiance $W.m^{-2}.sr^{-1}$)**
Blue light	L_B	300 700	0,25 10 10-100 100-10000	0,011 0,1	$10^6/t$ $10^6/t$ $10^6/t$ 100
Retinal thermal	L_R	380 1400	< 0,25 0,25 10	0,0017	^{0,25}) ^{0,25})
Retinal thermal (weak visual stimulus)	L_{IR}	780 1400	> 10	0,011	

IEC 62471:2006			
Clause	Requirement – Test	Result - Remark	Verdict

Table 6.1	Emission limits for risk groups of continuous wave lamps									P
Risk	Action spectrum	Units	Symbol	Exempt		Low risk		Mod risk		
				Limit	Result	Limit	Result	Limit	Result	
Actinic UV		$W.m^{-2}$	E_S	0.001	-	0.003	1.693×10^{-8}	0.03	-	
Near UV		$W.m^{-2}$	E_{UVA}	10	-	33	5.123×10^{-4}	100	-	
Blue light		$W.m^{-2}.sr^{-1}$	L_B	100	-	10000	9.265×10^{3}	4000000	-	
Blue light,small source		$W.m^{-2}$	E_B	1.0	-	1.0	-	400	-	
Retinal thermal		$W.m^{-2}.sr^{-1}$	L_R	(0.0265)	-	(0.0265)	$1.129x10^{5}$	(0.0265)	-	
Retinal thermal, Weak visual stimulus**		$W.m^{-2}.sr^{-1}$	L_{IR}	(0.0265)	-	(0.0265)	$1.119x10^{1}$	(0.0265)	-	
IR radiation Eye		$W.m^{-2}$	E_{IR}	100	-	570	0	3200	-	

** Involves evaluation of non-GLS source
NOTE The action functions: see Table 4.1 and Table 4.2
The applicance apertuer diameters: see 4.2.1
The limitations for the angular subtenses: see 4.2.2
The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5

Figure of Spectral distribution

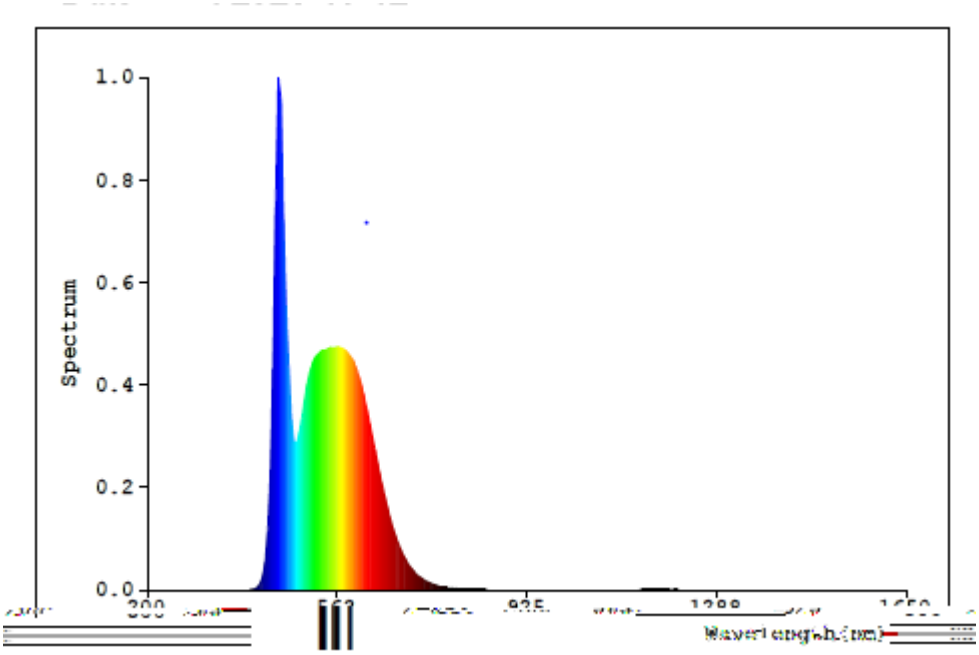

Appendix A - EUT Photos

The overall view of EUT

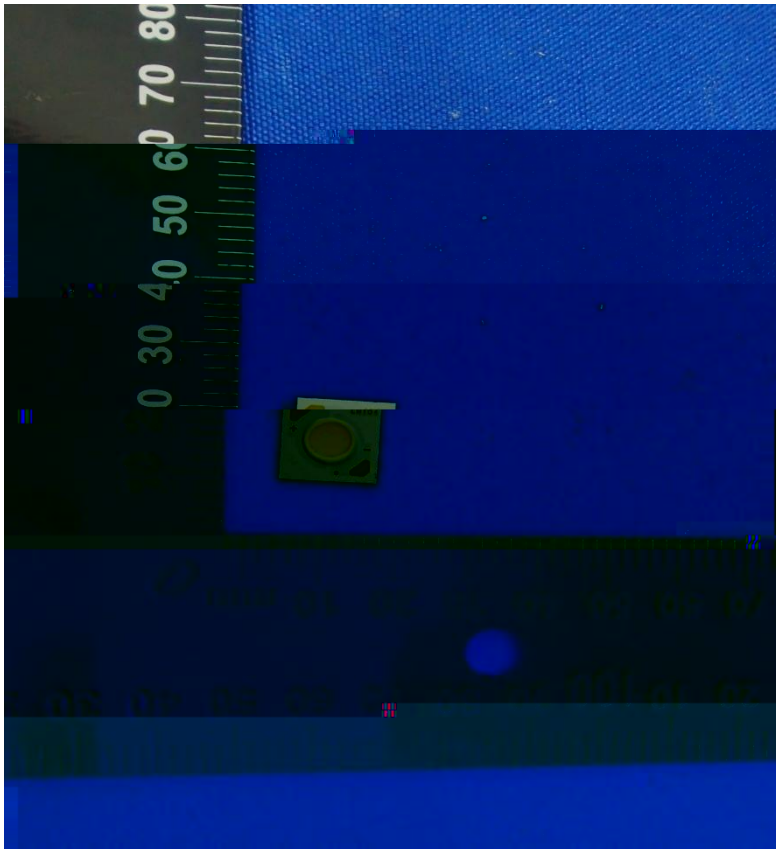

Directions

1.The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.

2.Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3.Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4.The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5.This report cannot be reproduced except in full, without prior written approval of the Company.

6.This report is valid only with rc idipany.